LIGHTING FIXTURE NOTES

KEY TO NOTE PREFIXES: "G" NOTES ARE "GENERAL" LIGHTING NOTES THAT APPLY TO THE ENTIRE PROJECT. "S" NOTES ARE "SCHEDULE" NOTES THAT APPLY TO SPECIFIC LUMINAIRES.

G.1 REFER TO ARCHITECTURAL REFLECTED CEILING PLANS, ELEVATIONS, SECTIONS, AND DETAILS FOR THE EXACT LOCATION OF ALL LUMINAIRES. ARCHITECTURAL PLANS SHALL GOVERN FOR LOCATION AND LAYOUT. IF ARCHITECTURAL AND ELECTRICAL DRAWINGS CONFLICT IN EXACT COUNT OR FIXTURE TYPE, PROVIDE THE GREATER QUANTITY OR COST TYPE UNLESS OTHERWISE INSTRUCTED.

G2. REFER TO DIVISION 26 ELECTRICAL SPECIFICATIONS FOR ADDITIONAL LUMINAIRE AND ELECTRICAL REQUIREMENTS (LENS, AIR HANDLING CHARACTERISTICS, T-BAR CLIPS, BALLAST, LAMPS, TIME FRAME FOR SUBMITTAL OF SUBSTITUTE LIGHT FIXTURES FOR PRIOR APPROVAL, ETC.).

G3. FOR EACH SCHEDULED LUMINAIRE, PROVIDE ALL REQUIRED APPURTENANCES FOR INSTALLATION IN APPLICABLE STRUCTURE OR SPECIFIED ARCHITECTURAL EILING. ALL LUMINAIRES SHALL HAVE THE APPROPRIATE NEMA TYPE FRAME THAT IS COMPATIBLE WITH THE CEILING SYSTEM SPECIFIED BY THE ARCHITECT. ELECTRICAL DRAWINGS DO NOT INDICATE CEILING TYPES, CONTRACTOR SHALL REFER TO ARCHITECTURAL PLANS TO DETERMINE CEILING TYPE (GRID, FLANGE, SPLINE, SCREW SLOT, ETC.) AND PROVIDE APPROPRIATE FRAME.

G4. EXIT SIGNS AND OTHER LUMINAIRES SHALL NOT BE SUPPORTED BY CEILING TILE. PROVIDE MOUNTING FRAME OR HANGERS TO SECURELY FASTEN IN PLACE ALL LUMINAIRES MOUNTED IN CEILING TILE. FRAMING MEMBERS OF A SUSPENDED CEILING SYSTEM MAY BE USED WHERE DESIGNED FOR THE PURPOSE AND INSTALLED PER NEC 410-16(c).

G5. WHERE A SURFACE-MOUNTED LUMINAIRE CONTAINING A BALLAST IS TO BE INSTALLED ON COMBUSTIBLE LOW-DENSITY CELLULOSE FIBERBOARD, IT SHALL BE LISTED FOR THIS CONDITION OR SHALL BE SPACED NOT LESS THAN 1 1/2 INCHES FROM THE SURFACE OF THE FIBERBOARD (NEC 410-76(b)).

G6. REQUEST FOR SUBSTITUTION SHALL FOLLOW SPECIFIED PROCEDURES AND SHALL INCLUDE A WORKING SAMPLE SUITABLE FOR TABLE TOP EXAMINATION.

S1. UNLESS OTHERWISE NOTED, MOUNT EXIT SIGN DIRECTLY ABOVE EGRESS DOOR (MAXIMUM 24" ABOVE DOOR), PROVIDE WALL MOUNT EXIT SIGNS IN HIGH CEILING AREAS, PROVIDE WINDOW MULLION MOUNTING WITH CONCEALED WIRING WHERE REQUIRED. COORDINATE EXACT ELEVATION WITH ARCHITECT PRIOR TO ROUGH-IN.

S2. PROVIDE KW #RTSP30-DBZ-DM-BC POLE. POLE SHAFT SHALL CONFORM TO ASTM-A-500 GRADE B, ANCHOR BASE OF HOT ROLLED CARBON STEEL, PROVIDE ANCHOR BOLTS. PROVIDE 30' POLE WITH MINIMUM 3 MIL. BAKED POLYESTER POWDER COAT FINISH. COLOR TO MATCH LUMINAIRE.

S3. PROVIDE KW #RTSP30-DBZ-DM2180-BC POLE. POLE SHAFT SHALL CONFORM TO ASTM-A-500 GRADE B, ANCHOR BASE OF HOT ROLLED CARBON STEEL, PROVIDE ANCHOR BOLTS. PROVIDE 30' POLE WITH MINIMUM 3 MIL. BAKED POLYESTER POWDER COAT FINISH. COLOR TO MATCH LUMINAIRE.

GENERAL ELECTRICAL REMODEL NOTES

1. UNLESS SPECIFICALLY INDICATED ON THE DRAWINGS OR OTHERWISE INSTRUCTED BY THE ARCHITECT, ELECTRICAL OUTLETS SHALL HAVE THE FOLLOWING MOUNTING HEIGHTS. DIMENSIONS ARE TO CENTER OF BOX UNLESS OTHERWISE NOTED:

WALL SWITCHES	•
WALL CONVENIENCE RECEPTACLES	15" AFF TO BOTTOM OF BOX
WALL DATA/VOICE OUTLETS	15" AFF TO BOTTOM OF BOX
WALL OUTLETS FOR WALL MTD. TELEPHONE	•
WALL CLOCK OUTLETS	7'-0" AFF (OR ABOVE CHALKBOARDS WHERE REQUIRED)*
MANUAL FIRE ALARM PULL STATIONS	•
FIRE ALARM SPEAKER/HORN	1'-0" BELOW CEILING, OR IN CEILING, AS REQUIRED*
INTERIOR BELLS,BUZZERS, HORNS	1'-0" BELOW CEILING, OR IN CEILING, AS REQUIRED*
SPECIAL PURPOSE WALL OUTLETS	15" AFF TO BOTTOM OF BOX (OR HIGHER AS REQUIRED TO SERVE EQUIPMENT)
PUSH BUTTONS	
ADA VISUAL ALARM	80" AFF TO BOTTOM OF LENS OR 6" BELOW CEILING, WHICHEVER IS LOWER. ENTIRE LENS TO BE WITHIN 80" TO 96" AFF*
	• TOP OF BOX SHALL BE 42" AFF MAX. FOR WHEELCHAIR FRONTAL APPROACH AND 48" AFF MAX. FOR SIDE APPROACH. VERIFY EXACT HEIGHT WITH ARCHITECT
	* 7'-0" AFF TO BOTTOM OF DEVICE IF DEVICE PROTRUDES MORE THAN 4" FROM WALL (PER ADA)

AFF = ABOVE FINISHED FLOOR
AFG = ABOVE FINISHED GRADE

2. UNLESS SPECIFICALLY INDICATED ON THE ELECTRICAL DRAWINGS, OUTLETS LOCATED AT COUNTERS AND CABINETS SHALL BE MOUNTED AS SHOWN ON ARCHITECTURAL DETAILS AND ELEVATIONS, OR AS DIRECTED BY ARCHITECT.
3. COORDINATE MOUNTING HEIGHTS AND DETAILS OF ALL OUTLETS (POWER, SIGNAL, ETC.) WITH ARCHITECTURAL CASEWORK DRAWINGS PRIOR TO DIVISION 26 ROUGH-IN. PROVIDE COORDINATION DRAWINGS IN ACCORDANCE WITH DIVISION 26 SPECIFICATIONS WHERE CONFLICTS EXIST. OBTAIN APPROVAL FROM ARCHITECT BEFORE ELECTRICAL ROUGH-IN WHEN CONFLICTS ARISE.
4. REFER TO MECHANICAL DRAWINGS FOR EXACT LOCATION OF ALL HVAC AND PLUMBING EQUIPMENT.
5. CIRCUITING
   A. BRANCH CIRCUITING IS SCHEMATIC IN NATURE AND IS INTENDED TO INDICATE CIRCUIT LOADING AND CONTROL, NOT METHODS OF INSTALLATION. REFER TO SPECIFICATIONS FOR METHODS OF INSTALLATION AND MATERIALS, INCLUDING WHETHER OR NOT BX IS ALLOWED AND WHETHER "THROUGH-FIXTURE" OR "OCTOPUS (EMT WITH FLEXIBLE WHIPS)" TYPE LIGHTING BRANCH CIRCUITING IS REQUIRED.
   B. WHERE WIRE SIZE AND CONDUIT SIZE IS NOT INDICATED ON THE DRAWINGS AND/OR PANEL SCHEDULES, REFER TO SPECIFICATIONS FOR MINIMUM SIZE REQUIRED.
   C. BRANCH CIRCUITS ON THE DRAWINGS ARE GENERALLY NOT SHOWN GROUPED IN SINGLE RACEWAYS. HOWEVER, GROUPING IS ALLOWED UNDER CERTAIN CONDITIONS. REFER TO DIVISION 26 SPECIFICATIONS UNDER SECTION ENTITLED "ELECTRICAL WIRING" FOR REQUIREMENTS.
   D. THE DRAWINGS GENERALLY INDICATE QUANTITY OF CONDUCTORS ON BRANCH CIRCUIT HOME RUNS ONLY. ELSEWHERE WITHIN CIRCUITS, PROVIDE QUANTITY OF CONDUCTORS AS NEEDED TO ACCOMPLISH CIRCUITING AND SWITCHING REQUIREMENTS SHOWN.
6. WHEN REMOVING EXISTING ELECTRICAL WORK WHERE OTHER ITEMS REMAIN ON THE SAME CIRCUIT, THE CONTRACTOR SHALL TAKE WHATEVER STEPS ARE NECESSARY TO MAINTAIN CIRCUIT CONTINUITY.
7. ALL ITEMS NOTED TO BE REMOVED ARE TO REMAIN THE PROPERTY OF THE OWNER; HOWEVER, CONTRACTOR SHALL REMOVE FROM JOB SITE ALL MATERIAL NOT RETAINED BY OWNER.
8. FIELD VERIFY CONDITION OF, AND MODIFICATIONS AND ADDITIONS TO, ALL EXISTING ELECTRICAL FIXTURES, PANELS, WIRING, ETC.
9. WHERE DOORS ARE ADDED, OR PORTIONS OF WALLS REMOVED, CONTRACTOR SHALL REMOVE OR RELOCATE ALL ELECTRICAL WORK NECESSARY FOR THE REMODELING MODIFICATION, WHETHER OR NOT THIS WORK IS NOTED ON PLANS.
10. WHERE EXISTING JUNCTION BOXES ARE COVERED OR REMOVED, CONTRACTOR SHALL TAKE WHATEVER STEPS ARE NECESSARY TO COMPLY WITH NEC 314-19.
11. EXISTING ELECTRICAL BOXES TO REMAIN IN AREAS WHERE NEW WALL FINISHES ARE TO BE APPLIED SHALL BE RESET AS NECESSARY TO PROVIDE FLUSH MOUNTING FOR BOXES.
12. CONTRACTOR SHALL FIELD VERIFY EXISTING BRANCH CIRCUIT LOADING WHEN MAKING MODIFICATIONS AND/OR ADDITIONS TO THAT CIRCUIT. IF NEW WORK WOULD OVERLOAD EXISTING CIRCUIT, CONTRACTOR SHALL LOCATE ANOTHER EXISTING CIRCUIT (THE CLOSEST), WHICH WOULD NOT BE OVERLOADED UPON ADDING NEW LOAD, AND SHALL TIE NEW LOAD INTO THAT CIRCUIT.
13. WHEN EXISTING ELECTRICAL WORK IS REMOVED, ALL EXPOSED CONDUIT, WIRING, CONTROL AND JUNCTION BOXES ALONG WALLS, FLOOR, AND CEILING SHALL BE REMOVED. BRANCH CIRCUIT WIRES SHALL BE REMOVED BACK TO CIRCUIT BREAKER(S). BLANK COVER PLATES SHALL BE PROVIDED FOR RECESSED BOXES. WHERE THIS WORK IS DONE, THE WALLS, FLOOR, AND CEILING SHALL BE PATCHES AS NECESSARY UNDER WORK COVERED IN OTHER SECTIONS.
14. EXISTING RECESSED INCANDESCENT AND HID LUMINAIRES DESIGNATED FOR TEMPORARY REMOVAL AND RE-USE SHALL BE STORED. ALL SUCH LUMINAIRES NOT THERMALLY PROTECTED PER NEC 410-118 AND 410-130(F) ARE NOT SUITABLE FOR RE-USE AND SHALL BE GIVEN TO THE OWNER. PROVIDE NEW REPLACEMENT LUMINAIRES WITH UL THERMAL PROTECTION, IDENTICAL APERTURE, EQUIVALENT PHOTOMETRICS AND NEW LAMPS.
15. CONTRACTOR TO REFER TO ARCHITECTURAL DEMOLITION PLANS AND PHASING PLANS AND HAVE A GOOD UNDERSTANDING OF SCOPE OF PROJECT PRIOR TO COMMENCEMENT OF WORK.
16. LUMINAIRE SUPPORT IN SUSPENDED CEILINGS:
   A. PROVIDE MEANS OF SUPPORT FOR LUMINAIRES PER NEC 410-16. T BAR CLIPS SHALL BE INSTALLED ON THE LUMINAIRE AND SHALL BE FIELD SECURED TO THE INVERTED CEILINGS TEES SO THAT THE LUMINAIRE IS SECURELY FASTENED TO THE CEILING SYSTEM FRAMING MEMBERS
   B. CEILING TILES SHALL NOT BEAR THE WEIGHT OF LUMINAIRES. SURFACE MOUNT LUMINAIRES, RECESSED DOWNLIGHTS, LIGHT TRACK, EXIT SIGNS, ETC. SHALL BE SUPPORTED BY PROPER FRAMES OR OTHER ATTACHMENT TO MAIN CEILING SYSTEM GRID OR BUILDING STRUCTURE ABOVE CEILING.
   C. LUMINAIRES SHALL BE CENTERED IN CEILING TILE.
   D. LUMINAIRE SHALL HAVE FLANGE OR TRIM RING FOR CLOSURE OF CEILING CUTOUT OR OPENING.
   E. FIRE-RATED CEILING ASSEMBLY: FOR LUMINAIRES TO BE FLUSH-MOUNTED INTO A FIRE-RATED CEILING OR SURFACE MOUNTED TO A FIRE-RATED CEILING, INSTALL WITH INDEPENDENT, SECURE SUPPORT, RACEWAY, CABLE ASSEMBLIES BOXES AND FITTINGS LOCATED ABOVE A FIRE-RATED FLOOR/CEILING OR ROOF CEILING ASSEMBLY SHALL NOT BE SECURED TO, OR SUPPORTED BY, THE CEILING ASSEMBLY INCLUDING CEILING SUPPORT WIRES. PROVIDE AN INDEPENDENT MEANS OF SECURE SUPPORT. INDEPENDENT SUPPORT WIRES SHALL BE DISTINGUISHABLE BY COLOR, TAGGING, OR OTHER EFFECTIVE MEANS FROM THOSE THAT ARE PART OF THE FIRE-RATED DESIGN.
17. CONTRACTOR SHALL FIELD VERIFY ANY EXISTING UNDERGROUND PIPING, WIRING, OR OTHER FACILITIES PRIOR TO TRENCHING, AND SHALL BE RESPONSIBLE FOR ANY DAMAGE CAUSED BY INSTALLATION OF NEW WORK.
18. THE ELECTRICAL CONTRACTOR SHALL COMPLY WITH ALL AUTHORITIES HAVING JURISDICTION, NEC, AND STATE AND LOCAL CODES AND AMENDMENTS.

APPLICABLE CODES

2023 FLORIDA BUILDING CODE (8TH EDITION) AND AMENDMENTS
2020 FLORIDA FIRE PREVENTION CODE (7TH EDITION) AND AMENDMENTS
2020 N.F.P.A. 70 (NATIONAL ELECTRIC CODE)

ELECTRICAL SYMBOL LEGEND

1. EVERY SYMBOL SHOWN ON LEGEND MAY NOT APPEAR ON DRAWINGS.
2. DASHED ELEECTRICAL EQUIPMENT GENERALLY INDICATES EXISTING EQUIPMENT.
3. LONG-SHORT-SHORT-LONG DASHING GENERALLY INDICATES MATCH LINE OR DEFINES AREA FOR SPECIAL NOTE.

CIRCUIT RELATED:

- LIGHTING OR POWER CIRCUIT(S). ARROW INDICATES HOME RUN, LONGER TICK(S) INDICATE NEUTRAL WIRE(S), SHORTER STRAIGHT TICK(S) INDICATE PHASE WIRE(S), SLANTED SHORTER TICK(S) INDICATE SWITCH LEG(S), DOT(S) INDICATE GROUNDING CONDUCTOR(S), DASHED WIRING (LONG-SHORT-LONG DASHES) INDICATES WIRING BELOW SLAB OR GRADE, DASHED WIRING (SERIES OF SHORT DASHES) INDICATES EXISTING WIRING, SLASH THROUGH ARROW INDICATES PARTIAL CIRCUIT, "D" ON HOMERUN ARROW INDICATES DEDICATED CIRCUIT. PROVIDE A SEPARATE NEUTRAL FOR EACH PHASE CONDUCTOR FOR ENTIRE LENGTH OF CIRCUIT FROM PANEL TO OUTLET; COUNT EACH NEUTRAL AS CURRENT-CARRYING AND GROUP A MAXIMUM OF SIX THHN/THWN CONDUCTORS IN A SINGLE RACEWAY; GROUNDING CONDUCTOR IS NOT COUNTED
- JUNCTION BOX
- GROUNDING FIXTURE

LIGHTING:

- LED LIGHTING FIXTURE. LETTER INDICATES TYPE, SMALL LETTER INDICATES SWITCH CONTROL, NUMBER INDICATES CIRCUIT, CROSS HATCHING INDICATES FIXTURE ON EMERGENCY SYSTEM, FOR SOLID CIRCLE WITHIN FIXTURE REFERENCE APPROPRIATE CATEGORY "A" CIRCUIT RELATED SYMBOL
- STRIP TYPE LED LIGHTING FIXTURE. LETTER INDICATES TYPE, SMALL LETTER INDICATES SWITCH CONTROL, NUMBER INDICATES CIRCUIT, FOR SOLID CIRCLE ATTACHED TO FIXTURE REFERENCE APPROPRIATE CATEGORY "A" CIRCUIT RELATED SYMBOL
- LED LIGHTING FIXTURE. LETTER INDICATES TYPE, SMALL LETTER INDICATES SWITCH CONTROL, NUMBER INDICATES CIRCUIT, FOR SOLID CIRCLE REFERENCE APPROPRIATE CATEGORY "A" CIRCUIT RELATED SYMBOL
- DESIGNATES FIXTURE ON EMERGENCY POWER. RE: LIGHTING PLAN NOTES AND FIXTURE SCHEDULE NOTES FOR ADDITIONAL INFORMATION
- WALL OR BRACKET MOUNTED FIXTURE OR DEVICE
- EXIT LIGHT FIXTURE. LETTER INDICATES TYPE, NUMBER INDICATES CIRCUIT, NUMBER AND LOCATION OF SHADED TRIANGLE SECTIONS INDICATE NUMBER OF EXIT SIGN FACES AND DIRECTION OF EACH FACE. PROVIDE CHEVRON DIRECTIONAL INDICATORS AS SHOWN ON DRAWINGS
- NL — LIGHTING FIXTURE WITH NIGHT LIGHT

CONTROL:

- $ — SWITCH. SMALL LETTER INDICATES FIXTURES CONTROLLED, "P" INDICATES PILOT LIGHT, "WP" INDICATES WEATHERPROOF, "K" INDICATES KEY POERATED, "MO" INDICATES SPDT MOMENTARY CONTACT, "2" INDICATES DPDT, "3" INDICATES 3-WAY, "4" INDICATES 4-WAY, "M" INDICATES MANUAL MOTOR STARTER, CIRCUIT DESIGNATION NEXT TO SWITCH INDICATES BRANCH CIRCUIT NUMBER
- $D — WALL BOX DIMMER SWITCH. "MARK" INDICATES WATTAGE IF OTHER THAN 600, "3D" INDICATES 3-WAY DIMMER
- $$ — MULTI-LEVEL SWITCH. CIRCUIT DESIGNATION NEXT TO SWITCH INDICATES BRANCH CIRCUIT NUMBER
- $T — DIGITAL TIME SWITCH
- (PC) — PHOTOELECTRIC CONTROL
- EMERGENCY POWER OFF (EPO) PUSHBUTTON
- PUSH BUTTON
- $OC — WALL MOUNT OCCUPANCY SENSOR
- DUAL TECHNOLOGY CEILING MOUNTED OCCUPANCY SENSOR
- (R) — CEILING MOUNTED RESTROOM OCCUPANCY SENSOR
- CEILING MOUNTED CORRIDOR OCCUPANCY SENSOR
- (HB) — CEILING MOUNTED HIGH CEILING OCCUPANCY SENSOR

POWER OUTLETS:

- 20A-125V DUPLEX RECEPTACLE
- 20A-125V GROUND FAULT CIRCUIT INTERRUPTER RECEPTACLE, "WP" INDICATES WEATHER PROOF DEVICE
- 20A-125V DUPLEX RECEPTACLE MOUNTED ABOVE COUNTER TOP. REFER TO ARCHITECT FOR EXACT HEIGHT ABOVE COUNTER
- C — 20A-125V CONTROLLED DUPLEX RECEPTACLE
- 20A-125V ISOLATED GROUND TYPE DUPLEX RECEPTACLE
- CH — 20A-125V DUPLEX TAMPER RESISTANT RECEPTACLE WITH (2) USB CHARGING PORTS
- 20A-125V FOURPLEX RECEPTACLE. SAME SYMBOLOGY AS DUPLEX RECEPTACLE
- SPECIAL PURPOSE SINGLE POWER RECEPTACLE. RATED AS INDICATED (IF NO RATING INDICATED, RECEPTACLE RATING SHALL MATCH BRANCH CIRCUIT OVERCURRENT PROTECTIVE DEVICE AND SHALL MEET REQUIREMENTS OF EQUIPMENT BEING CONNECTED), "C" INDICATES CLOCK OUTLET
- 20A-125V FLUSH FLOOR DUPLEX RECEPTACLE. 20A WHEN INDICATED OR IF BRANCH CIRCUIT SERVES ONLY SINGLE DUPLEX. PROVIDE CARPED FLANGE WHERE APPLICABLE
- LC1-X — CIRCUIT DESIGNATION NEXT TO RECEPTACLE DEVICES INDICATES BRANCH CIRCUIT NUMBER. RE: PANEL SCHEDULES FOR INFORMATION.

TELEPHONE/DATA:

- FLUSH FLOOR TELEPHONE OUTLET WITH CARPET FLANGE WHERE APPLICABLE
- WALL COMMUNICATIONS OR DATA OUTLET. REFER TO 'TS' SERIES SHEETS FOR EXACT BOX / CONDUIT REQUIREMENTS
- FLUSH FLOOR COMMUNICATIONS OR DATA OUTLET. REFER TO 'TS' SERIES SHEETS FOR EXACT BOX / CONDUIT REQUIREMENTS. PROVIDE CARPET FLANGE WHERE APPLICABLE
- SURFACE FLOOR COMMUNICATIONS OR DATA OUTLET. REFER TO 'TS' SERIES SHEETS FOR EXACT BOX / CONDUIT REQUIREMENTS. PROVIDE CARPET FLANGE WHERE APPLICABLE

EQUIPMENT:

- +42" — A NOTATION INDICATING THE MOUNTING HEIGHT OF A DEVICE AS MEASURED FROM FINISHED FLOOR OR GRADE TO CENTER LINE OF DEVICE
- MOTOR
- DISCONNECT SWITCH. FRAME SIZE/FUSE SIZE/POLES AS INDICATED, "NF" INDICATES NON-FUSIBLE. NEMA 1 ENCLOSURE UNLESS OTHERWISE NOTED. PROVIDE FUSED BUSWAY PLUG WHEN SWITCH IS INDICATED ON BUSWAY. ALL DISCONNECT SWITCHES SHALL BE 30/NF/3 UNLESS OTHERWISE NOTED
- SINGLE CIRCUIT BREAKER IN INDIVIDUAL ENCLOSURE
- MAGNETIC MOTOR CONTROLLER. NUMBER INDICATES NEMA SIZE. STARTER NEMA SIZE SHALL BE "NEMA 1" UNLESS OTHERWISE NOTED
- COMBINATION DISCONNECT SWITCH / MOTOR CONTROLLER
- CONTACTOR
- PANELBOARD
- SWITCHBOARD / DP
- T — TRANSFORMER
- GROUNDING CONNECTION TO GROUNDING ELECTRODE AS DEFINED IN NEC ARTICLE 250

HARVARD•JOLLY|PBK
2047 Vista Parkway, Suite 100 West Palm Beach, FL 33411 | 561-478-4457 | www.HarvardJolly.com | AR 0013140
LEAF ENGINEERS

PALM BEACH GARDENS
ADDITION FOR: POLICE DEPARTMENT
10500 NORTH MILITARY TRAIL PALM BEACH GARDENS, FL.
100% CONSTRUCTION DOCUMENTS

Comm. No: 20057.03
Date: 8/2/2024
Drawn: Author

Revisions		
No.	Date	Revision Description

TO THE BEST OF MY KNOWLEDGE, THE PLANS AND SPECIFICATIONS COMPLY WITH THE MINIMUM BUILDING CODES.

DANIEL C. ROGERS LICENSE No. 67915 STATE OF FLORIDA PROFESSIONAL ENGINEER
08/02/2024

This item has been digitally signed and sealed by Daniel C. Rogers on the date adjacent to the seal. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

ELECTRICAL SYMBOL LEGEND

E-100

FILE PATH: C:_Revit\Local\E23_2005703-PALM BEACH POLICE_josh.reynoso.rvt
PRINTED: 8/2/2024 10:24:45 AM



1 1ST FLOOR POWER PLAN
SCALE: 1/8" = 1'-0"

POWER PLAN GENERAL NOTES:

1. FOR EQUIPMENT OR DEVICES SHOWN ON ARCHITECTURAL DRAWINGS THAT REQUIRE POWER AND NOT IDENTIFIED ON ELECTRICAL PLANS, ASSUME AT A MINIMUM A DUPLEX OUTLET, A DEDICATED CIRCUIT WITH 2#12,1#12G,3/4"C. WITH HOMERUN TO NEAREST 120/208V PANEL. ITEMS SUCH AS BUT NOT LIMITED TO ROLL DOWN DOORS, COUNTER DOORS, OVERHEAD GRILLES, DISPLAY CASES, HAND DRYERS, WATER COOLERS, ICE MAKERS, GARBAGE DISPOSALS, OSCILLATING FANS, LCD's, PROJECTORS, DISHWASHERS, MOTORIZED PROJECTION SCREENS, ETC.
2. DATA/COMMUNICATION OUTLETS ARE SHOWN ON THIS DRAWING FOR COORDINATION PURPOSES ONLY. PROVIDE AND INSTALL ALL CONDUITS AND BACK BOXES REQUIRED BY LOW VOLTAGE SYSTEMS. COORDINATE WITH 'TS' DRAWINGS, DETAILS, ETC. AND ARCHITECTURAL DRAWINGS FOR EXACT QUANTITIES, LOCATIONS, AND REQUIREMENTS PRIOR TO ROUGH-IN.
3. CONTRACTOR TO PROVIDE CONNECTION FROM EXHAUST FANS TO ALL MOTORIZED BACKDRAFT DAMPERS AS REQUIRED, COORDINATE WITH MECHANICAL.

POWER PLAN KEYED NOTES

(1) PROVIDE TYPICAL OFFICE DEVICE LAYOUT AND BRANCH CIRCUIT CONFIGURATION AND ADDITIONAL CIRCUITING AND DEVICES WHERE INDICATED. REFER TO KEYED NOTE #1 FOR TYPICAL OFFICE. REFER TO PANEL SCHEDULES FOR CIRCUITS DESIGNATED TO SERVE THIS AREA

(2) CONTRACTOR TO VERIFY AND COORDINATE WITH OWNER AND TECHNOLOGY CONTRACTOR FOR EXACT POWER REQUIREMENTS IN IDF ROOM INCLUDING BUT NOT LIMITED RECEPTACLE NEMA CONFIGURATION, MOUNTING, LOCATION, ETC, AND PROVIDE AS REQUIRED. ALL RECEPTACLES SHOULD BE ISOLATED GROUND

(3) PROVIDE L5-30R TWISTLOCK RECEPTACLE TO IDF EQUIPMENT IN THIS ROOM

(4) FLOOR BOXES - PROVIDE 4-GANG FLOOR BOX WIREMOLD EVOLUTION RFBA SERIES RECTANGULAR. PROVIDE 3/4"C FOR POWER AND (2) 1-1/4" CONDUIT WITH PULLSTRINGS FOR DATA, ROUTE UNDERSLAB TO NEAREST FULL HEIGHT WALL AND UP TO ACCESSIBLE CEILING PLENUM. FLOORBOX COVER FINISHES TBD BY ARCHITECT

(5) PROVIDE POWER TO TV AND VERIFY HEIGHT WITH ARCHITECT BEFORE ROUGH-IN

(6) TRANSFORMER TO BE SUPENDED FROM STRUCTURE. VERIFY LOCATION AND HEIGHT

(7) PROVIDE POWER TO PLUMBING FIXTURE. COORDINATE WITH PULMBING INSTALLATION

(8) RECEPTACLE FOR DISPOSAL TO INSTALLED UNDER CABINET TO BE CONTROLLED BY SWITCHED MOUNTED ABOVE COUNTER

(9) INTERLOCK RESTROOM EXHAUST FAN WITH RESTROOM'S SWITCHED LGHTING BRANCH CIRCUIT

(10) INSTALL NEW SUB PANEL IN EOC ELECTRICAL ROOM. NEW PANEL TO BE FED FROM EXISTING EOC UPS. POWER FOR NEW I.T. CIRCUITS TO BE PROVIDED BY NEW PANEL. COORDINATE WITH OWNER AND OWNER'S CONSULTANTS

HARVARD•JOLLY|PBK
2047 Vista Parkway, Suite 100 West Palm Beach, FL 33411 | 561-478-4457 | www.HarvardJolly.com | AR 0013140
LEAF ENGINEERS

PALM BEACH GARDENS
ADDITION FOR: POLICE DEPARTMENT
10500 NORTH MILITARY TRAIL PALM BEACH GARDENS, FL.
100% CONSTRUCTION DOCUMENTS

Comm. No:	20057.03
Date:	8/2/2024
Drawn:	Author

Revisions		
No.	Date	Revision Description

TO THE BEST OF MY KNOWLEDGE, THE PLANS AND SPECIFICATIONS COMPLY WITH THE MINIMUM BUILDING CODES.


DANIEL C. ROGERS LICENSE No. 67915 STATE OF FLORIDA PROFESSIONAL ENGINEER
08/02/2024

This item has been digitally signed and sealed by Daniel C. Rogers on the date adjacent to the seal. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

1ST FLOOR POWER PLAN

E-101

FILE PATH: C:_Revit\Local\E23_2005703-PALM BEACH POLICE_josh.reynosa.rvt
PRINTED: 8/2/2024 10:24:46 AM

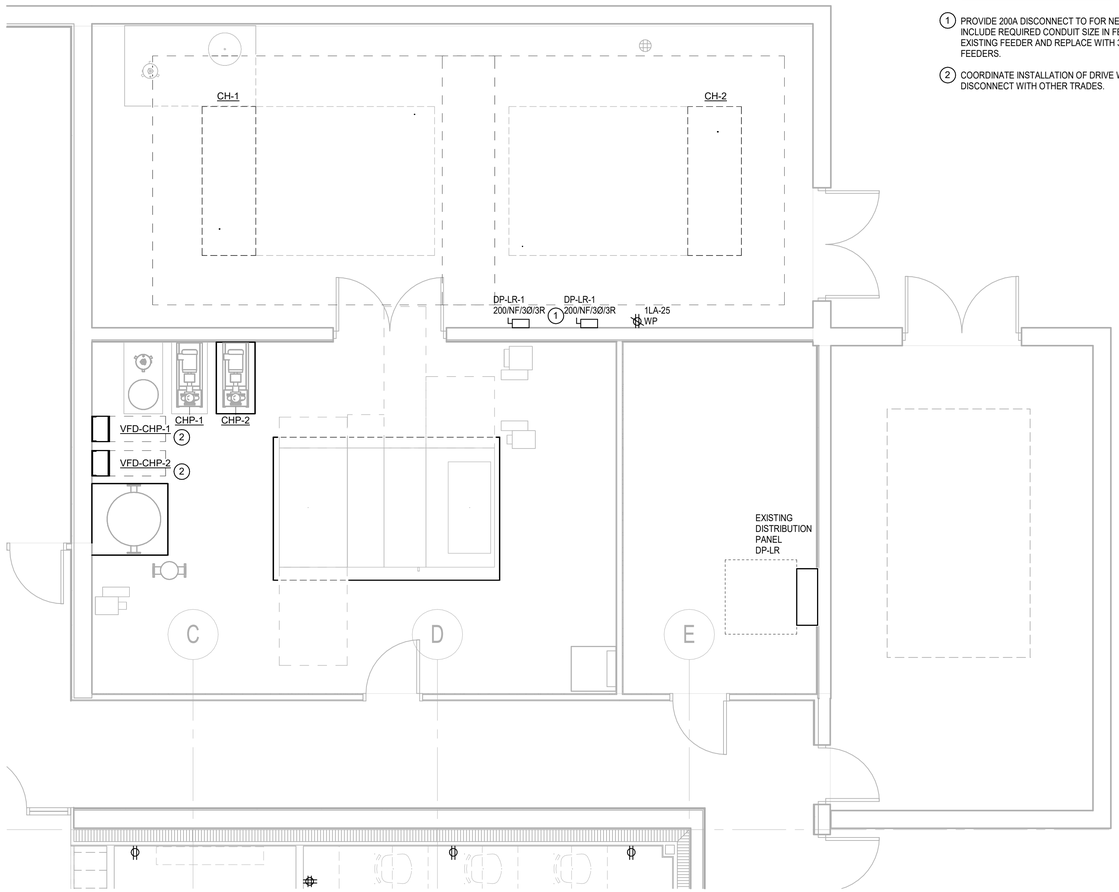

POWER PLAN KEYED NOTES

1. PROVIDE 200A DISCONNECT TO FOR NEW WATER CHILLER. INCLUDE REQUIRED CONDUIT SIZE IN FEEDER SPEC. REMOVE EXISTING FEEDER AND REPLACE WITH 3#3/0 AWG, 1#6 GND FEEDERS.
2. COORDINATE INSTALLATION OF DRIVE WITH INTERGRAL DISCONNECT WITH OTHER TRADES.

1 ENLARGED MECHANICAL ROOM

SCALE: 1/4" = 1'-0"

HARVARD•JOLLY|PBK
2047 Vista Parkway, Suite 100 West Palm Beach, FL 33411 | 561-478-4457 | www.HarvardJolly.com | AR 0013140

LEAF ENGINEERS

PALM BEACH GARDENS
ADDITION FOR: POLICE DEPARTMENT
10500 NORTH MILITARY TRAIL PALM BEACH GARDENS, FL.
100% CONSTRUCTION DOCUMENTS

Comm. No:	20057.03
Date:	8/2/2024
Drawn:	Author

Revisions		
No.	Date	Revision Description

TO THE BEST OF MY KNOWLEDGE, THE PLANS AND SPECIFICATIONS COMPLY WITH THE MINIMUM BUILDING CODES.

DANIEL C. ROGERS LICENSE No. 67915 STATE OF FLORIDA PROFESSIONAL ENGINEER

08/02/2024

This item has been digitally signed and sealed by Daniel C. Rogers on the date adjacent to the seal. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

ENLARGED MECHANICAL ROOM

E-101A

FILE PATH: C:_Revit\Local\E23_20057\03-PALM BEACH POLICE_josh.myroso.rvt
PRINTED: 8/2/2024 10:24:47 AM



POWER PLAN GENERAL NOTES:

1. FOR EQUIPMENT OR DEVICES SHOWN ON ARCHITECTURAL DRAWINGS THAT REQUIRE POWER AND NOT IDENTIFIED ON ELECTRICAL PLANS, ASSUME AT A MINIMUM A DUPLEX OUTLET, A DEDICATED CIRCUIT WITH 2#12,1#12G,3/4"C. WITH HOMERUN TO NEAREST 120/208V PANEL. ITEMS SUCH AS BUT NOT LIMITED TO ROLL DOWN DOORS, COUNTER DOORS, OVERHEAD GRILLES, DISPLAY CASES, HAND DRYERS, WATER COOLERS, ICE MAKERS, GARBAGE DISPOSALS, OSCILLATING FANS, LCD's, PROJECTORS, DISHWASHERS, MOTORIZED PROJECTION SCREENS, ETC.
2. DATA/COMMUNICATION OUTLETS ARE SHOWN ON THIS DRAWING FOR COORDINATION PURPOSES ONLY. PROVIDE AND INSTALL ALL CONDUITS AND BACK BOXES REQUIRED BY LOW VOLTAGE SYSTEMS. COORDINATE WITH 'TS' DRAWINGS, DETAILS, ETC. AND ARCHITECTURAL DRAWINGS FOR EXACT QUANTITIES, LOCATIONS, AND REQUIREMENTS PRIOR TO ROUGH-IN.
3. CONTRACTOR TO PROVIDE CONNECTION FROM EXHAUST FANS TO ALL MOTORIZED BACKDRAFT DAMPERS AS REQUIRED, COORDINATE WITH MECHANICAL.

1. PROVIDE FLEXIBLE CORD WHIP TO CONNECT BETWEEN FURNITURE SYSTEM. PROVIDE 3 POLE CIRCUIT FOR FURNITURE SYSTEM AND 1 POLE CIRCUIT FOR FURNITURE POWER. COORDINATE WITH MANUFACTURER FOR DETAIL.
2. CEILING MOUNTED CORD REEL. WOODHEAD #9383 (25', 12 AWG, 3-CONDUTOR SOW CABLE) WITH BALL STOP AND 20A PENDANT DUPLEX RECEPTABLE END WITH TWO 5-20R DUPLEX RECEPTABLES WOODHEAD #9383-3080.
3. PROVIDE POWER TO TV AND VERIFY HEIGHT WITH ARCHITECT BEFORE ROUGH-IN
4. PROVIDE POWER TO PLUMBING FIXTURE. COORDINATE WITH PLUMBING INSTALLATION.
5. RECEPTACLE FOR DISPOSAL TO INSTALLED UNDER CABINET TO BE CONTROLLED BY SWITCHED MOUNTED ABOVE COUNTER
6. INTERLOCK RESTROOM EXHAUST FAN WITH RESTROOM'S SWITCHED LGHTING BRANCH CIRCUIT

1 2ND FLOOR POWER PLAN
SCALE: 1/8" = 1'-0"

HARVARD•JOLLY|PBK
2047 Vista Parkway, Suite 100 West Palm Beach, FL 33411 | 561-478-4457 | www.HarvardJolly.com | AR 0013140
LEAF ENGINEERS

PALM BEACH GARDENS
ADDITION FOR: POLICE DEPARTMENT
10500 NORTH MILITARY TRAIL PALM BEACH GARDENS, FL.
100% CONSTRUCTION DOCUMENTS

Comm. No:	20057.03
Date:	8/2/2024
Drawn:	Author

Revisions		
No.	Date	Revision Description

TO THE BEST OF MY KNOWLEDGE, THE PLANS AND SPECIFICATIONS COMPLY WITH THE MINIMUM BUILDING CODES.


DANIEL C. ROGERS LICENSE No. 67915 STATE OF FLORIDA PROFESSIONAL ENGINEER
08/02/2024

This item has been digitally signed and sealed by Daniel C. Rogers on the date adjacent to the seal. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

2ND FLOOR POWER PLAN

E-102

FILE PATH: C:_Revit\Local\E23_20057\3-PALM BEACH POLICE_josh.reynoso.rvt
PRINTED: 8/2/2024 10:24:47 AM

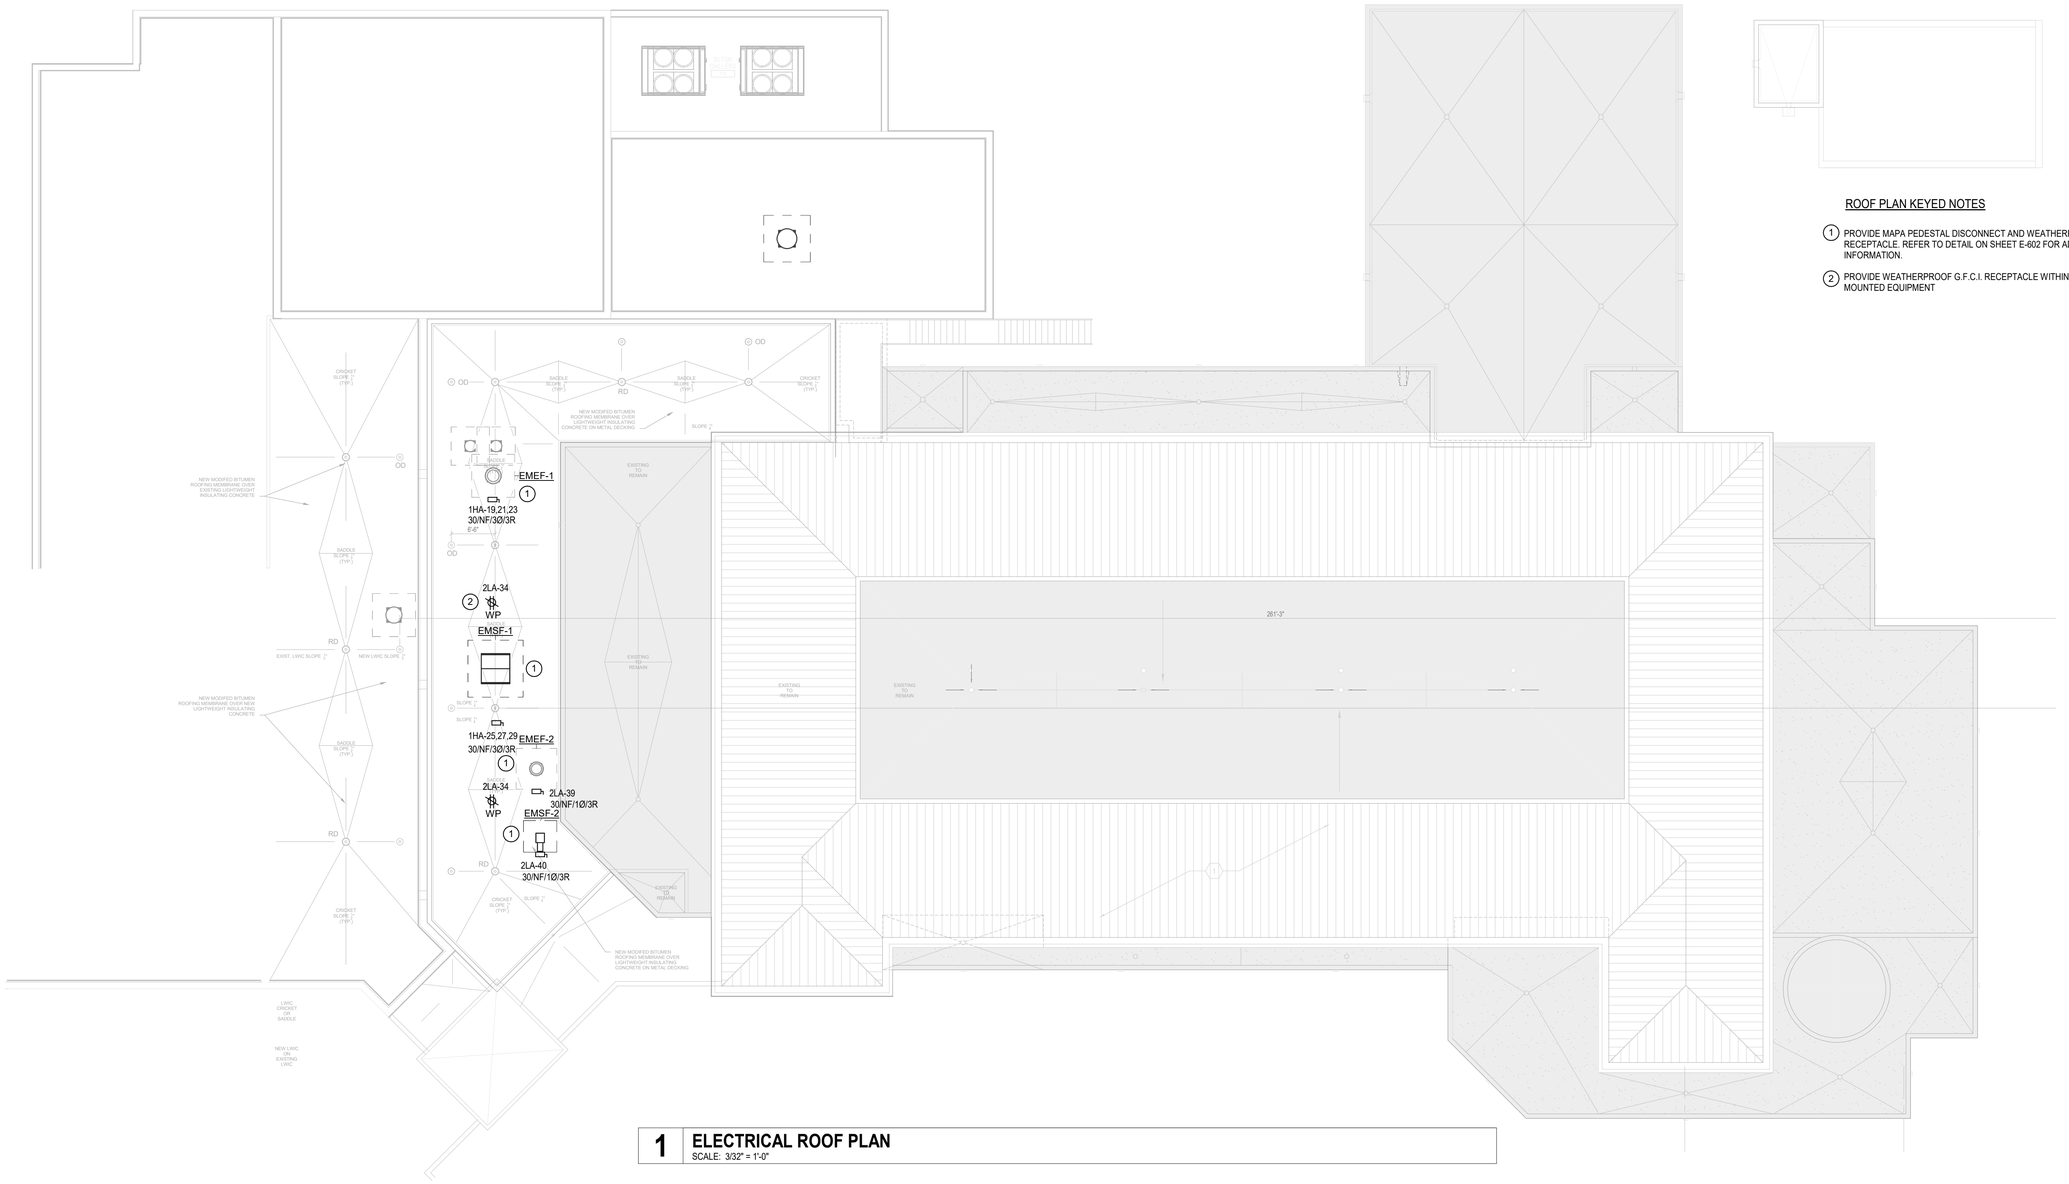

1 ELECTRICAL ROOF PLAN

SCALE: 3/32" = 1'-0"

ROOF PLAN KEYED NOTES

1. PROVIDE MAPA PEDESTAL DISCONNECT AND WEATHERPROOF RECEPTACLE. REFER TO DETAIL ON SHEET E-602 FOR ADDITIONAL INFORMATION.
2. PROVIDE WEATHERPROOF G.F.C.I. RECEPTACLE WITHIN 25 FT. OF ALL MOUNTED EQUIPMENT

HARVARD•JOLLY|PBK
2047 Vista Parkway, Suite 100 | West Palm Beach, FL 33411 | 561-478-4457 | www.HarvardJolly.com | AR 0013140

LEAF ENGINEERS

PALM BEACH GARDENS
ADDITION FOR: POLICE DEPARTMENT
10500 NORTH MILITARY TRAIL PALM BEACH GARDENS, FL.
100% CONSTRUCTION DOCUMENTS

Comm. No:	20057.03
Date:	8/2/2024
Drawn:	Author

Revisions		
No.	Date	Revision Description

TO THE BEST OF MY KNOWLEDGE, THE PLANS AND SPECIFICATIONS COMPLY WITH THE MINIMUM BUILDING CODES.

DANIEL C. ROGERS LICENSE No. 67915 STATE OF FLORIDA PROFESSIONAL ENGINEER

08/02/2024

This item has been digitally signed and sealed by Daniel C. Rogers on the date adjacent to the seal. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

ELECTRICAL ROOF PLAN

E-103

FILE PATH: C:_Revit Local\E23_20057\03-PALM BEACH POLICE_josh.reynolds.rvt
PRINTED: 8/2/2024 10:24:48 AM



1 1ST FLOOR LIGHTING PLAN
SCALE: 1/8" = 1'-0"

LIGHTING PLAN GENERAL NOTES

1. REFER TO ARCHITECT'S REFLECTED CEILING PLAN FOR EXACT LOCATIONS OF ALL LIGHTING FIXTURES.
2. UNLESS OTHERWISE NOTED, ALL 2X4'S ARE TYPE "A", ALL EXIT SIGNS ARE TYPE "X".
3. PROVIDE EMERGENCY BATTERY PACKS FOR ALL LIGHTING FIXTURES DESIGNATED TO BE ON EMERGENCY POWER AND EXIT SIGNS. PROVIDE UNSWITCHED HOT TO BATTERY SO THAT LIGHT FIXTURES CAN BE SWITCHED OFF AND ON WITHOUT DRAINING BATTERY. RE: DIVISION 26 SPECIFICATIONS FOR ADDITIONAL INFORMATION. PROVIDE 20A UNSWITCHED BRANCH CIRCUIT (2#12, 1#12G, 3/4"C) FROM LIGHTING PANEL TO ALL EXIT SIGNS IN THIS AREA.
4. PROVIDE DIMMING CONTROLS FOR LIGHT FIXTURES IN OFFICES, CONERENCE ROOMS, AND OTHER SPACES WHERE INDICATED.

LIGHTING PLAN KEYED NOTES

(1) PROVIDE TYPICAL OFFICE LIGHTING LAYOUT AND BRANCH CIRCUIT CONFIGURATION . REFER TO KEYED NOTE #1 FOR TYPICAL OFFICE. REFER TO PANEL SCHEDULES FOR CIRCUITS DESIGNATED TO SERVE THIS AREA.

HARVARD•JOLLY|PBK
2047 Vista Parkway, Suite 100 West Palm Beach, FL 33411 | 561-478-4457 | www.HarvardJolly.com | AR 0013140
LEAF ENGINEERS

PALM BEACH GARDENS
ADDITION FOR: POLICE DEPARTMENT
10500 NORTH MILITARY TRAIL PALM BEACH GARDENS, FL.
100% CONSTRUCTION DOCUMENTS

Comm. No:	20057.03
Date:	8/2/2024
Drawn:	Author

Revisions		
No.	Date	Revision Description

TO THE BEST OF MY KNOWLEDGE, THE PLANS AND SPECIFICATIONS COMPLY WITH THE MINIMUM BUILDING CODES.

DANIEL C. ROGERS LICENSE No. 67915 STATE OF FLORIDA PROFESSIONAL ENGINEER
08/02/2024

This item has been digitally signed and sealed by Daniel C. Rogers on the date adjacent to the seal. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

1ST FLOOR LIGHTING PLAN

E-201

FILE PATH: C:_Revit\Local\E23_20057103-PALM BEACH POLICE_josh.reynoso.rvt
PRINTED: 8/2/2024 10:27:44 AM



1 2ND FLOOR LIGHTING PLAN

SCALE: 1/8" = 1'-0"

LIGHTING PLAN GENERAL NOTES

1. REFER TO ARCHITECT'S REFLECTED CEILING PLAN FOR EXACT LOCATIONS OF ALL LIGHTING FIXTURES.
2. UNLESS OTHERWISE NOTED, ALL 2X4'S ARE TYPE "A", ALL EXIT SIGNS ARE TYPE "X".
3. PROVIDE EMERGENCY BATTERY PACKS FOR ALL LIGHTING FIXTURES DESIGNATED TO BE ON EMERGENCY POWER AND EXIT SIGNS. PROVIDE UNSWITCHED HOT TO BATTERY SO THAT LIGHT FIXTURES CAN BE SWITCHED OFF AND ON WITHOUT DRAINING BATTERY. RE: DIVISION 26 SPECIFICATIONS FOR ADDITIONAL INFORMATION. PROVIDE 20A UNSWITCHED BRANCH CIRCUIT (2#12, 1#12G, 3/4"C) FROM LIGHTING PANEL TO ALL EXIT SIGNS IN THIS AREA.
4. PROVIDE DIMMING CONTROLS FOR LIGHT FIXTURES IN OFFICES, CONERENCE ROOMS, AND OTHER SPACES WHERE INDICATED.

HARVARD•JOLLY|PBK
2047 Vista Parkway, Suite 100 West Palm Beach, FL 33411 | 561-478-4457 | www.HarvardJolly.com | AR 0013140

LEAF ENGINEERS

PALM BEACH GARDENS
ADDITION FOR: POLICE DEPARTMENT
10500 NORTH MILITARY TRAIL PALM BEACH GARDENS, FL.
100% CONSTRUCTION DOCUMENTS

Comm. No:	20057.03
Date:	8/2/2024
Drawn:	Author

Revisions		
No.	Date	Revision Description

TO THE BEST OF MY KNOWLEDGE, THE PLANS AND SPECIFICATIONS COMPLY WITH THE MINIMUM BUILDING CODES.

DANIEL C. ROGERS LICENSE No. 67915 STATE OF FLORIDA PROFESSIONAL ENGINEER


08/02/2024

This item has been digitally signed and sealed by Daniel C. Rogers on the date adjacent to the seal. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

2ND FLOOR LIGHTING PLAN

E-202

FILE PATH: C:_Revit\Local\E23_20057\03-PALM BEACH POLICE_josh.reynoso.rvt
PRINTED: 8/2/2024 10:24:49 AM

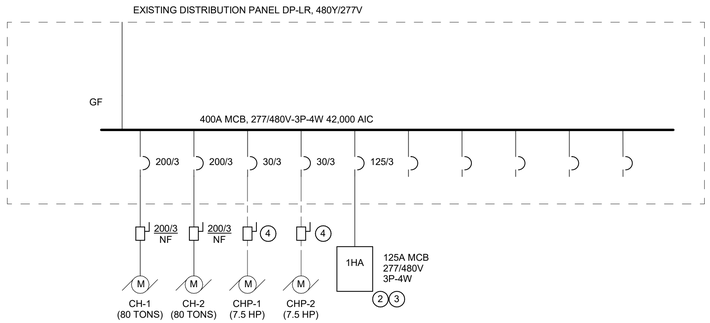

ELECTRICAL ONE-LINE DIAGRAM NOTES:


#. INDICATES GENERAL NOTE.
(#) INDICATES KEYED NOTE.

1. REFER TO RISER DIAGRAM FOR FEEDER WIRE / CONDUIT SIZES AND FOR ALL FEEDER SIZES NOT SHOWN ON THIS SHEET.

(2) 1 #2/0 COPPER GROUND CONDUCTOR IN 1" CONDUIT TO MAIN INCOMING METAL WATER PIPE, TO MADE GROUNDING ELECTRODE AND TO BUILDING GROUND.

(3) REFERENCE RISER DIAGRAM FOR CONTINUATION OF FEEDERS

(4) REUSE EXISTING DISCONNECT AND FEEDERS

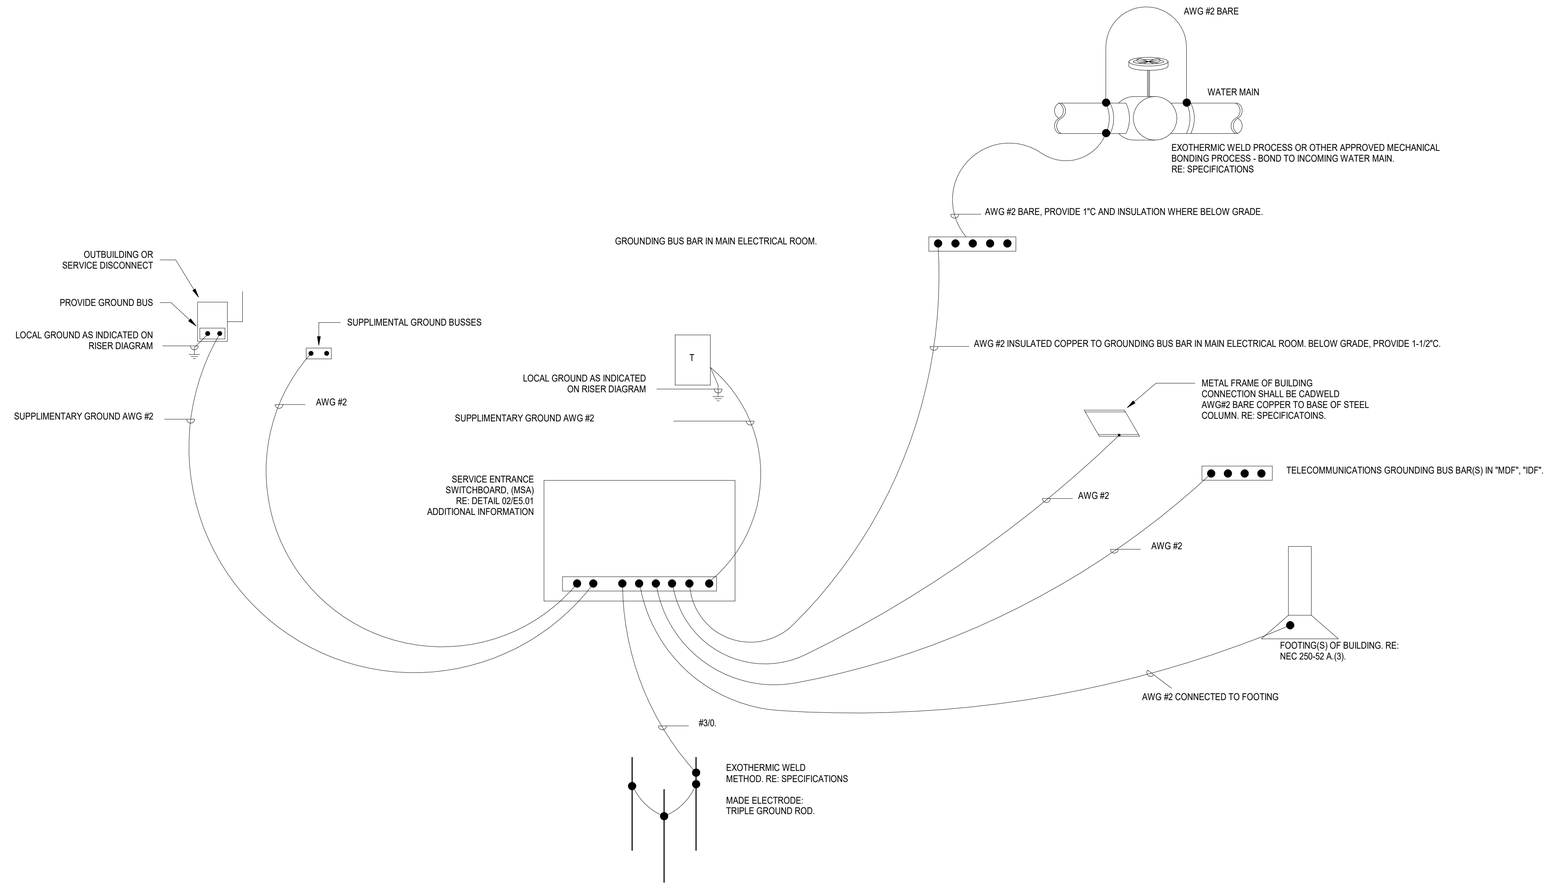

1 ELECTRICAL GROUNDING REQUIREMENTS
NOT TO SCALE

HARVARD•JOLLY|PBK
2047 Vista Parkway, Suite 100 West Palm Beach, FL 33411 | 561-478-4457 | www.HarvardJolly.com | AR 0013140
LEAF ENGINEERS

PALM BEACH GARDENS
ADDITION FOR: POLICE DEPARTMENT
10500 NORTH MILITARY TRAIL PALM BEACH GARDENS, FL.
100% CONSTRUCTION DOCUMENTS

Comm. No: 20057.03
Date: 8/2/2024
Drawn: Author

Revisions		
No.	Date	Revision Description

TO THE BEST OF MY KNOWLEDGE, THE PLANS AND SPECIFICATIONS COMPLY WITH THE MINIMUM BUILDING CODES.

DANIEL C. ROGERS LICENSE No. 67915 STATE OF FLORIDA PROFESSIONAL ENGINEER
08/02/2024

This item has been digitally signed and sealed by Daniel C. Rogers on the date adjacent to the seal. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

ELECTRICAL ONE-LINE DIAGRAM

E-501

FILE PATH: C:_Revit Local\E23_20057.03-PALM BEACH POLICE_josh.reynoso.rvt
PRINTED: 8/2/2024 10:24:49 AM


ESTIMATED LOAD IMPACT TO PALM BEACH GARDENS EOC SERVICE FROM CHILLER UPGRADE AND PD EXPANSION ADDITION		
Service Load	**Amount**	**Units**
Recorded Demand (provided from owner meter)	83.4	kVA
+25% Demand Premium (per NEC 220.87)	20.9	kVA
Chiller upgrade to 80T (difference from ex. 50T)1	45.7	kVA
Pump upgrade for 80T (5bhp to 7.5bhp)2	2.8	kVA
Est. Addition Load3	103.9	kVA
Subtotal:	**256.7**	kVA
Estimated service amperage with upgraded loads	**308.7**	Amps
Existing EOC service ampacity at 277/480V 3ph	**800.0**	Amps

NOTES:

1. Based on full load differential between existing 50T chiller and proposed 80T unit.

2. Based on full load differential between existing 5bhp pump and proposed 7.5bhp pump needed for 80T system.

3. Based on current Police Department Expansion designed electrical loads.

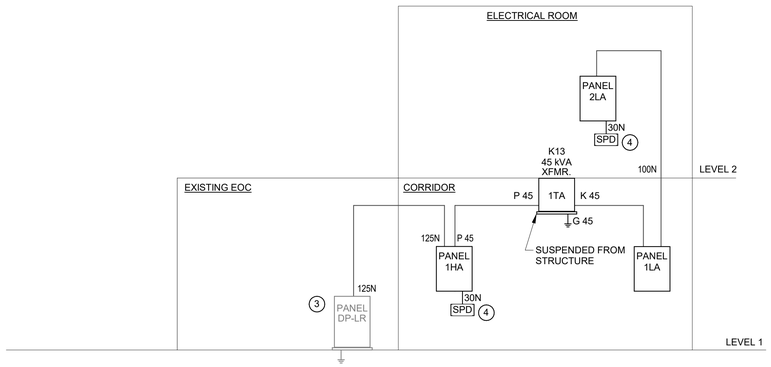

ELECTRICAL ONE-LINE DIAGRAM NOTES:

#. INDICATES GENERAL NOTE.
Ⓟ INDICATES KEYED NOTE.

1. UNLESS NOTED OTHERWISE, ALL TRANSFORMERS TO BE 480: 208/120 VOLT 3P, 4W.
2. PROVIDE THRU-FEED LUGS FOR ALL MULTI-SECTION PANELBOARDS.
3. REFERENCE ONE-LINE DIAGRAM FOR ADDITIONAL INFORMATION.
4. SURGE PROTECTIVE DEVICE, RE: DIVISION 26 SPECIFICATIONS FOR ADDITIONAL INFORMATION.

1 ELECTRICAL RISER DIAGRAM
SCALE: 1/8" = 1'-0"

ALUMINUM FEEDER SCHEDULE				
TAG NUMBER	CONDUCTOR QUANTITY AND SIZE	CONDUIT SIZE	SETS	COMMENTS
200	3#250, 1#4G	2"	1	
200N	4#250, 1#4G	2 1/2"	1	
225	3#300, 1#2G	2 1/2"	1	
225N	4#300, 1#2G	3"	1	
250	3#350, 1#2G	2 1/2"	1	
250N	4#350, 1#2G	3"	1	
300	3#500, 1#2G	3"	1	
300N	4#500, 1#2G	3"	1	
400	3#250, 1#1G	2 1/2"	2	
400N	4#250, 1#1G	2 1/2"	2	
600	3#500, 1#2/0G	3"	2	
600N	4#500, 1#2/0G	3 1/2"	2	
800	3#400, 1#3/0G	3"	3	
800N	4#400, 1#3/0G	3"	3	
1200	3#500, 1#3/0G	3"	4	
1200N	4#500, 1#3/0G	3 1/2"	4	

FEEDER SCHEDULE				
TAG NUMBER	CONDUCTOR QUANTITY AND SIZE	CONDUIT SIZE	SETS	COMMENTS
30N	4#10, 1#10G	1"	1	
50N	4#6, 1#10G	1"	1	
60N	4#6, 1#10G	1"	1	
100	3#1, 1#8G	1 1/2"	1	
100N	4#1, 1#8G	1 1/2"	1	
125	3#1, 1#6G	1 1/2"	1	
125N	4#1, 1#6G	2"	1	
150	3#1/0, 1#6G	1 1/2"	1	
150N	4#1/0, 1#6G	2"	1	
175	3#2/0, 1#6G	2"	1	
175N	4#2/0, 1#6G	2"	1	
200	3#3/0, 1#6G	2"	1	
200N	4#3/0, 1#6G	2"	1	
225	3#4/0, 1#4G	2"	1	
225N	4#4/0, 1#4G	2 1/2"	1	
250	3#250, 1#4G	2 1/2"	1	
250N	4#250, 1#4G	3"	1	
300	3#350, 1#4G	3"	1	
300N	4#350, 1#4G	3"	1	
400	3#3/0, 1#3G	2"	2	
400N	4#3/0, 1#3G	2"	2	
400S	4#500	3 1/2"	1	
600	3#350, 1#1G	3"	2	
600N	4#350, 1#1G	3"	2	
600S	4#350	3"	2	
800	3#500, 1#1/0G	3"	2	
800N	4#500, 1#1/0G	3 1/2"	2	
800S	4#500	3 1/2"	2	
1000	3#400, 1#2/0G	3"	3	
1000N	4#400, 1#2/0G	3"	3	
1000S	4#400	3"	3	
1200	3#350, 1#3/0G	3"	4	
1200N	4#350, 1#3/0G	3"	4	
1200S	4#350	3"	4	
1600S	4#400	3"	5	
2000S	4#400	3"	6	
2500S	4#500	3 1/2"	7	
3000S	4#500	3 1/2"	8	
4000S	4#500	3 1/2"	11	

FEEDER SCHEDULE NOTES:

NOT ALL FEEDERS MAY BE USED IN THIS PROJECT.

TRANSFORMER FEEDER SCHEDULE				
TAG NUMBER	CONDUCTOR QUANTITY AND SIZE	CONDUIT SIZE	SETS	COMMENTS
P15	3#10, 1#10G	3/4"	1	
S15	4#6, 1#8G	1"	1	
K15	3#4, 1#6N, 1#8G	1 1/4"	1	
G15	1#8G	1/2"	1	
P15	2#8, 1#10G	3/4"	1	FOR 480 1Ø: 120/240 1Ø TRANSFORMERS
S15	3#4, 1#6G	1 1/2"	1	FOR 480 1Ø: 120/240 1Ø TRANSFORMERS
G15	1#6G	3/4"	1	FOR 480 1Ø: 120/240 1Ø TRANSFORMERS
P25	2#6, 1#10G	1"	1	FOR 480 1Ø: 120/240 1Ø TRANSFORMERS
D25	3#1, 1#6G	1 1/2"	1	FOR 480 1Ø: 120/240 1Ø TRANSFORMERS
G25	1#6G	3/4"	1	FOR 480 1Ø: 120/240 1Ø TRANSFORMERS
P30	3#6, 1#10G	3/4"	1	
S30	4#1, 1#6G	1 1/2"	1	
K30	3 #1/0, 1#2/0N, 1#6G	2"	1	
G30	1#6G	1/2"	1	
P37	2#1, 1#6G	1 1/4"	1	FOR 480 1Ø: 120/240 1Ø TRANSFORMERS
D37	3#3/0, 1#4G	3"	1	FOR 480 1Ø: 120/240 1Ø TRANSFORMERS
G37	1#4G	3/4"	1	FOR 480 1Ø: 120/240 1Ø TRANSFORMERS
P45	3#4, 1#8G	1"	1	
S45	4#1/0, 1#6G	1 1/2"	1	
K45	3#2/0, 1#250, 1#4G	2"	1	
G45	1#6G	1/2"	1	
P50	2#1, 1#6G	1 1/4"	1	
S50	3#3/0, 1#3G	2"	1	
G50	1#3G	3/4"	1	
P75	3#1, 1#8G	1 1/2"	1	
S75	4#4/0, 1#2G	2 1/2"	1	
K75	3#4/0, 2#3/0N, 1#2G	2 1/2"	1	
G75	1#1/0G	1/2"	1	
P75	2#3/0, 1#6G	2"	1	FOR 480 1Ø: 120/240 1Ø TRANSFORMERS
S75	3#3/0, 1#4G	2"	2	FOR 480 1Ø: 120/240 1Ø TRANSFORMERS
G75	1#4G	3/4"	1	FOR 480 1Ø: 120/240 1Ø TRANSFORMERS
P75A	3#1, 1#8G	1 1/2"	1	FOR 480 3Ø: 120/240 3Ø TRANSFORMERS
S75A	4#4/0, 1#2G	2 1/2"	1	FOR 480 3Ø: 120/240 3Ø TRANSFORMERS
G75A	1#2G	1/2"	1	FOR 480 3Ø: 120/240 3Ø TRANSFORMERS
P112	3#2/0, #6G	2"	1	
S112	4#3/0, 1#1/0G	2"	2	
K112	3#4/0, 1#350N, 1#1/0G	2 1/2"	2	
G112	1#1/0G	3/4"	1	
P150	3#250, 1#4G	2 1/2"	1	
S150	4#350, 1#2/0G	3"	2	
K150	3#350, 2#3/0N, 1#2/0G	3"	2	
G150	1#2/0G	3/4"	1	
P167	2#4/0, 1#2/0G	2"	2	FOR 480 1Ø: 120/240 1Ø TRANSFORMERS
S167	3#350, 1#3/0G	3"	3	FOR 480 1Ø: 120/240 1Ø TRANSFORMERS
G167	1#3/0G	3/4"	1	FOR 480 1Ø: 120/240 1Ø TRANSFORMERS
P225	3#500, 3#3G	3"	1	
S225	4#300, 1#2/0G	3"	1	
K225	3#350, 2#3/0, 1#1G	3 1/2"	3	
G225	1#2/0G	3/4"	1	

This item has been digitally signed and sealed by Daniel C. Rogers on the date adjacent to the seal. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

HARVARD•JOLLY|PBK
2047 Vista Parkway, Suite 100 West Palm Beach, FL 33411 | 561-478-4457 | www.HarvardJolly.com | AR 0013140

LEAF ENGINEERS

PALM BEACH GARDENS
ADDITION FOR: POLICE DEPARTMENT
10500 NORTH MILITARY TRAIL PALM BEACH GARDENS, FL.
100% CONSTRUCTION DOCUMENTS

Comm. No: 20057.03
Date: 8/2/2024
Drawn: Author

Revisions		
No.	Date	Revision Description

TO THE BEST OF MY KNOWLEDGE, THE PLANS AND SPECIFICATIONS COMPLY WITH THE MIAMI-DADE BUILDING CODES.


DANIEL C. ROGERS LICENSE No. 67915 STATE OF FLORIDA PROFESSIONAL ENGINEER

08/02/2024


ELECTRICAL RISER DIAGRAM

E-502


FILE PATH: C:_Revit\Local\E23_2005703-PALM BEACH POLICE_josh.reynoso.rvt
PRINTED: 8/2/2024 10:24:49 AM

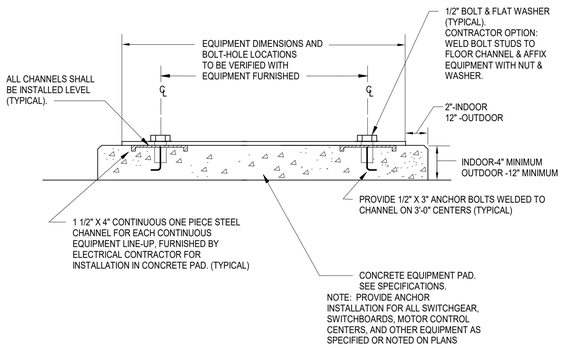

3 EQUIPMENT ANCHOR DETAIL
NOT TO SCALE

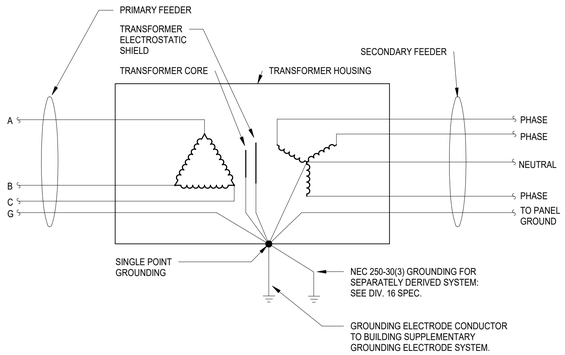

2 DELTA-WYE TRANSFORMER SCHEMATIC
NOT TO SCALE

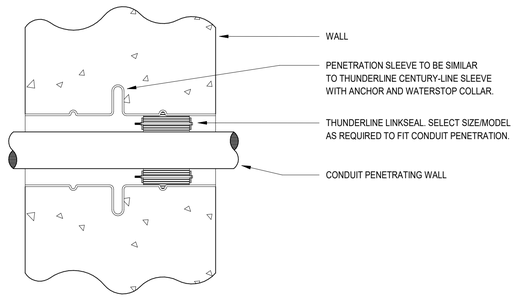

1 CONDUIT PENETRATION DETAIL - EXTERIOR WALL
NOT TO SCALE

EOR W/ PD EXPANSION PBG

LIGHTING FIXTURE SCHEDULE

TYPE	MANUFACTURER	CATALOG NUMBER	DESCRIPTION	LAMPS		VOLTS	DIM TYPE	MOUNTING	REMARKS
				Type	Total Wattage				
A	HE WILLIAMS	PT-24-L49-840-RA-DIM-UNV	2X4 LED SHALLOW BASKET	LED/4K	36.7	UNV	0-10V	RECESSED	
AE	HE WILLIAMS	PT-24-L49-840-RA-EM/10W-DIM-UNV	2X4 LED SHALLOW BASKET W/ BATTERY	LED/4K	36.7	UNV	0-10V	RECESSED	
B	HE WILLIAMS	PT-24-L61-840-RA-DIM-UNV	2X4 LED SHALLOW BASKET	LED/4K	45.5	UNV	0-10V	RECESSED	
BE	HE WILLIAMS	PT-24-L61-840-RA-EM/10W-DIM-UNV	2X4 LED SHALLOW BASKET W/ BATTERY	LED/4K	45.5	UNV	0-10V	RECESSED	
C	HE WILLIAMS	PT-22-L43-840-RA-DIM-UNV	2X2 LED SHALLOW BASKET	LED/4K	32.2	UNV	0-10V	RECESSED	
CE	HE WILLIAMS	PT-22-L43-840-RA-EM/10W-DIM-UNV	2X2 LED SHALLOW BASKET W/ BATTERY	LED/4K	32.2	UNV	0-10V	RECESSED	
K	FINELITE	HP4-P-D-LENGTH-H-835-F-96LG-VOLT-SC-FC-10%-FA50-FE-SW-RLD	4" LED LINEAR	LED/35K	10.5W/LF	UNV	0-10V	PENDANT	CONTR TO CONFIRM LENGTHS AND MOUNTING PER PLANS
M	HE WILLIAMS	17-4-L55-840-DIM-UNV	4' LED WRAP	LED/4K	42.3	UNV	0-10V	SURFACE	
ME	HE WILLIAMS	17-4-L55-840-EM/10W-DIM-UNV	4' LED WRAP W/ BATTERY	LED/4K	42.3	UNV	0-10V	SURFACE	
EM	BEGHELLI	TA-LED-SE-AT	LED EMERGENCY UNIT	LED	36	UNV	N/A	SURFACE	
EX	BEGHELLI	VA-R/G-SA	LED PLASTIC EXIT	LED	3	UNV	N/A	SURFACE	
EX1	BEGHELLI	OL2-SA-L/G/LR-1/2-*-**	LED EDGELIT EXIT	LED	3	UNV	N/A	RECESSED	CONTR TO CONFIRM CONFIGURATION PER PLANS

LIGHTING SCHEDULE NOTES:


1. CONTACT SESCO LIGHTING (PATTY ROSSIELLO) @ 561-632-4192 OR prossiello@sescolighting.com
2. THE ABOVE FIXTURE SCHEDULE IS PREDICATED ON PERFORMANCE AND IS DESIGNED TO MEET CERTAIN AESTHETIC CRITERIA. ALL ALTERNATIVE SELECTIONS MUST BE SUBMITTED TO THE ARCHITECT FOR APPROVAL TEN (10) DAYS PRIOR TO BID DATE.

SESCO LIGHTING

4. NO SUBSITUTIONS ALLOWED.


GENERAL LIGHTING SCHEDULE NOTES

1. REFER TO ARCHITECT'S REFLECTED CEILING PLAN AND RELATED DETAILS TO DETERMINE PROPER CEILING TYPE COMPATIBILITY FOR EACH LUMINAIRE. PROVIDE ANY EXTRA FITTINGS OR OPTIONS AS REQUIRED TO ENSURE CORRECT MOUNTING IN THE GIVEN CEILING.
2. PROVIDE FIRE RATED CANOPY OR ENCLOSURE FOR ALL FIXTURES RECESSED IN A FIRE RATED CEILING. THE FIRE RATED CANOPY OR ENCLOSURE SHALL BE REQUIRED BY THE UL DESIGN NUMBER LISTED IN THE UL FIRE RESISTANCE DIRECTORY. REFER TO ARCHITECTURAL DRAWING FOR THE UL DESIGN NUMBER. COORDINATE WITH CEILING INSTALLER AND MANUFACTURER.

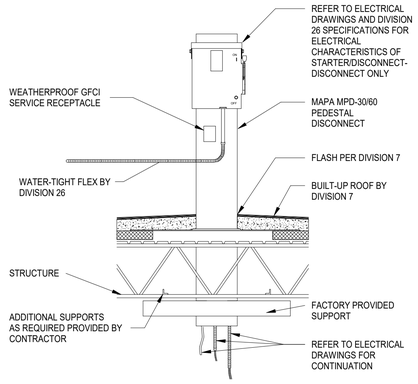

NOTES:
1. WATER-TIGHT FLEX CONDUIT SHALL NOT RESTRICT FAN FROM ROTATING ON HINGED SUB-BASE FOR SERVICE TO DAMPERS AND DUCT CONNECTION. REFER TO DIVISION 26.

4 PEDESTAL MOUNT DISCONNECT
NOT TO SCALE

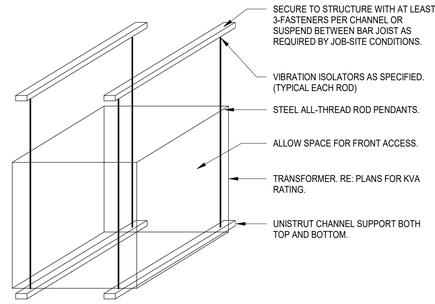

NOTES:
1. LOAD BEARING MATERIALS SHALL BE PROPERLY SIZED TO SUPPORT WEIGHT OF TRANSFORMER.
2. THIS DETAIL TYPICAL FOR TRANSFORMERS INDICATED TO BE SUPENSION MOUNTED.
3. UNISTRUT MEMBERS SHALL BE SECURED AT PANEL POINTS OF BAR JOIST AND WELDED (OR BOLTED) IN PLACE FOR STEEL STRUCTURES.
4. UNISTRUT MEMBERS SHALL BE SECURED TO CONCRETE STRUCTURES WITH LOAD BEARING INSERTS CORRECTLY PLACED IN CONCRETE JOIST.
5. CONTRACTOR SHALL OBTAIN APPROVAL OF PROPOSED INSTALLATION(S) FROM ARCHITECT'S STRUCTURAL REPRESENTATIVE.
6. TRANSFORMERS INDICATED TO BE SUSPENDED IN AREAS WHERE CEILINGS OCCUR SHALL BE LOCATED ABOVE CEILING.

5 SUSPENDED TRANSFORMER MOUNTING DETAIL
NOT TO SCALE

HARVARD•JOLLY|PBK
2047 Vista Parkway, Suite 100 | West Palm Beach, FL 33411 | 561-478-4457 | www.HarvardJolly.com | AR 0013140
LEAF ENGINEERS

PALM BEACH GARDENS
ADDITION FOR: POLICE DEPARTMENT
10500 NORTH MILITARY TRAIL PALM BEACH GARDENS, FL.
100% CONSTRUCTION DOCUMENTS

Comm. No: 20057.03
Date: 8/2/2024
Drawn: Author

Revisions		
No.	Date	Revision Description

TO THE BEST OF MY KNOWLEDGE, THE PLANS AND SPECIFICATIONS COMPLY WITH THE MINIMUM BUILDING CODES.

DANIEL C. ROGERS LICENSE No. 67915 STATE OF FLORIDA PROFESSIONAL ENGINEER
08/02/2024

ELECTRICAL DETAILS AND LTG SCHEDULE

E-601

This item has been digitally signed and sealed by Daniel C. Rogers on the date adjacent to the seal. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

FILE PATH: C:_Revit\Local\E23_20057\03-PALM BEACH POLICE_josh.rtynowo.rvt
PRINTED: 8/2/2024 10:24:50 AM

Job: Palm Beach Garden Police Dept. | Job No. 2005703

Mounting **SURFACE** | Voltage: **480Y/277V-3PH 4W** | A/C Rating **25000**
Main Type **MCB (125A)** | Main Size: **125 AMPS** | Ground **Equipment Ground**
Neutral **100%** | Lugs **SINGLE**

PANEL: **1HA**

ALL LOADS IN VA																							
Ltg.	Recept	Motor	Heat	Cool	Other	Kitchen	S/S	Description	Amp/P	Wire	Cir. No.	Ph	Cir. No.	Wire	Amp/P	Description	Ltg.	Recept	Motor	Heat	Cool	Other	Kitchen	S/S
		1704	3333				0.00	FCU-1-1	20/3	#12	**1**	**A**	**2**	#12	15/3	FCU-2-1			1283	1666				0.00
		1704	3333				0.00	-	20/3	#12	**3**	**B**	**4**	#12	15/3	-			1283	1666				0.00
		1704	3333				0.00	-	20/3	#12	**5**	**C**	**6**	#12	15/3	-			1283	1666				0.00
		559	434				0.00	FCU-1-2	15/3	#12	**7**	**A**	**8**	#12	15/3	FCU-2-2			558	433				0.00
		558	433				0.00	-	15/3	#12	**9**	**B**	**10**	#12	15/3	-			558	433				0.00
		558	433				0.00	-	15/3	#12	**11**	**C**	**12**	#12	15/3	-			558	433				0.00
547	5606	945			6467		0.00	XFMR 1TA (PANEL 1LA)	70/3	#3	**13**	**A**	**14**	#12	20/3	FCU-2-3			1979	3333				0.00
547	5606	945			6467		0.00	-	70/3	#3	**15**	**B**	**16**	#12	20/3	-			1979	3333				0.00
547	5606	945			6467		0.00	-	70/3	#3	**17**	**C**	**18**	#12	20/3	-			1979	3333				0.00
		582					0.00	EMEF-1	20/3	#12	**19**	**A**	**20**	#12	15/3	FCU-2-4			868	1666				0.00
		582					0.00	-	20/3	#12	**21**	**B**	**22**	#12	15/3	-			868	1666				0.00
		582					0.00	-	20/3	#12	**23**	**C**	**24**	#12	15/3	-			868	1666				0.00
		582					0.00	EMSF-1	20/3	#12	**25**	**A**	**26**			SPARE								1.00
		582					0.00	-	20/3	#12	**27**	**B**	**28**			SPARE								1.00
		582					0.00	-	20/3	#12	**29**	**C**	**30**			SPARE								1.00
							1.00	SPARE			**31**	**A**	**32**			SPARE								1.00
							1.00	SPARE			**33**	**B**	**34**			SPARE								1.00
							0.00	SPACE			**35**	**C**	**36**			SPACE								0.00
							0.00	SPACE			**37**	**A**	**38**			SPACE								0.00
							0.00	SPACE			**39**	**B**	**40**			SPACE								0.00
							0.00	SPACE			**41**	**C**	**42**			SPACE								0.00
1641	16819	13115	11299	0	19400	0	2.00	**TOTALS**								**TOTALS**	0	0	14064	21294	0	0	0	5.00

LOAD SUMMARY							
Ltg.	Recept	Motor	Heat	Cool	Other	Kitchen	S/S
1.6	16.8	27.2	32.6	0.0	19.4	0.0	7.0
1.25	**	1.00	1.00	1.00	1.00	0.65	0.50
2.1	13.4	27.2	32.6	0.0	19.4	0.0	3.5

Description
Connected KVA
*Design Factors
Design KVA

Phase Load	
Ph	KVA
A	32.5
B	32.5
C	32.5

Panel Remarks:

*Input di...
**100% ...

	Con. KVA	Con. Amps		Des. KVA	Des. Amps
TOTAL	104.6	125.9		98.1	118.0

PANEL: **1HA**

Date: 7/11/2024 | By: Joshua Reynoso | 1HA1HA1

Job: Palm Beach Garden Police Dept. | Job No. 2005703

Mounting **SURFACE** | Voltage: **208Y/120V-3PH 4W** | A/C Rating **22000**
Main Type **MCB (125A)** | Main Size: **125 AMPS** | Ground **Equipment Ground**
Neutral **100%** | Lugs **SINGLE**

PANEL: **1LA**

ALL LOADS IN VA																							
Ltg.	Recept	Motor	Heat	Cool	Other	Kitchen	S/S	Description	Amp/P	Wire	Cir. No.	Ph	Cir. No.	Wire	Amp/P	Description	Ltg.	Recept	Motor	Heat	Cool	Other	Kitchen	S/S
	1038						0.00	LIGHTING	20/1	#12	**1**	**A**	**2**	#12	20/1	CONF. RECEPTS		1080						0.00
	900						0.00	OFFICE RECEPTS	20/1	#12	**3**	**B**	**4**	#12	20/1	CONF. QUADS		360						0.00
	900						0.00	OFFICE RECEPTS	20/1	#12	**5**	**C**	**6**	#12	20/1	CONF. QUADS		360						0.00
	900						0.00	OFFICE RECEPTS	20/1	#12	**7**	**A**	**8**	#12	20/1	CONF. FLOORBOX		1080						0.00
	900						0.00	OFFICE RECEPTS	20/1	#12	**9**	**B**	**10**	#12	20/1	CONF. FLOORBOX		1080						0.00
	900						0.00	OFFICE RECEPTS	20/1	#12	**11**	**C**	**12**	#12	20/1	QUIET RM RECEPTS		360						0.00
	900						0.00	OFFICE RECEPTS	20/1	#12	**13**	**A**	**14**	#12	20/1	BATHROOM RECEPT		360						0.00
	900						0.00	OFFICE RECEPTS	20/1	#12	**15**	**B**	**16**	#12	20/1	CORRIDOR RECEPT		720						0.00
					1200		0.00	MICROWAVE	20/1	#12	**17**	**C**	**18**	#12	20/1	EF-1-1-A			667					0.00
	540						0.00	BREAK RM RECEPT	20/1	#12	**19**	**A**	**20**	#1	100/3	PANEL 2LA	438	2793	723			6067		0.00
	1000						0.00	REF.	20/1	#12	**21**	**B**	**22**	-	-	-	438	2793	723			6067		0.00
	800						0.00	DISPOSAL	20/1	#12	**23**	**C**	**24**	-	-	-	438	2793	723			6067		0.00
	180						0.00	CHILLER RECEPT.	20/1	#12	**25**	**A**	**26**			SPARE								1.00
							1.00	SPARE			**27**	**B**	**28**			SPARE								1.00
							0.00	SPACE			**29**	**C**	**30**			SPACE								0.00
							0.00	SPACE			**31**	**A**	**32**			SPACE								0.00
							0.00	SPACE			**33**	**B**	**34**			SPACE								0.00
							0.00	SPACE			**35**	**C**	**36**			SPACE								0.00
							0.00	SPACE			**37**	**A**	**38**			SPACE								0.00
							0.00	SPACE			**39**	**B**	**40**			SPACE								0.00
							0.00	SPACE			**41**	**C**	**42**			SPACE								0.00
0	9858	0	0	0	1200	0	1.00	**TOTALS**								**TOTALS**	1313	13780	2836	0	0	18200	0	2.00

LOAD SUMMARY							
Ltg.	Recept	Motor	Heat	Cool	Other	Kitchen	S/S
1.3	23.6	2.8	0.0	0.0	19.4	0.0	3.0
1.25	**	1.00	1.00	1.00	1.00	0.65	0.50
1.6	16.8	2.8	0.0	0.0	19.4	0.0	2.5

Description
Connected KVA
*Design Factors
Design KVA

Phase Load	
Ph	KVA
A	16.1
B	15.9
C	15.2

Panel Remarks:

*Input di...
**100% ...

	Con. KVA	Con. Amps		Des. KVA	Des. Amps
TOTAL	50.2	139.3		43.2	119.9

PANEL: **1LA**

Date: 7/11/2024 | By: Joshua Reynoso | 1LA1LA1

Electrical...

Job: Palm Beach Garden Police Dept. | A/C Rating: **42000**

Job No.: 2005703 | DISTRIBUTI... **DP-LR...** | Volts - Phase: **480Y/277V-3PH 4W**

Served From:

Connected Load (KVA)

Cir. No.	Load Served	Amp/Poles	Wire and Conduit Size	Lighting	Conv. Outlets	Motors	Heating	Cooling	Others	Elect. Cooking	Spare/ Spaces	Elevators	Residential	Total KVA	Total Amps
1	**CHILLER CH-1/CH-2**	**(2) 200/3**	**(2) 3#3/0, 1#6 GND, 2"C**			**134.7**								**134.7**	**162.0**
2	**PUMP CHP-1/CHP-2**	**(2) 30/3**	(2) 3#12, 1#12 GND 1/2"C			**9.1**								**9.1**	**11.0**
3	*** AHU 2-1/2-1 (10HP+HEAT)	80/3				EXST.	EXST.							0.0	0.0
4	*** AHU1-1 (15HP)	50/3				EXST.								0.0	0.0
5	*** PANEL MP-LR	100/3			EXST.		EXST.		EXST.					0.0	0.0
6	*** UPS (65KVA)	125/3			EXST.									0.0	0.0
7	*** WELL PUMP (3HP)	15/3				EXST.								0.0	0.0
8	**PANEL 1HA**	**125/3**	**4#1, 1#6 GND, 2"C**	**2.1**	**13.4**	**27.2**	**32.6**	**0.0**	**19.4**					**94.6**	**113.8**
9														0.0	0.0
10														0.0	0.0
11														0.0	0.0
12														0.0	0.0
Total...				2.1	13.4	171.0	32.6	0.0	19.4	0.0	0.0	0.0	0.0	238.4	286.8
				--	--	--	--	--	--	--	--	--	--	--	--
Demand...				1.25	*	**	1.0	1.00	0.65	0.5	0.0	0.0	0.0	--	--
															****
Total Dema...				2.6	11.7	171.0	32.6	0.0	19.4	0.0	0.0	0.0	0.0	237.2	285.3

* 100% of 1st 10 KVA, 50% of remaining.
** 125% of largest motor + 100% sum of remaining motors
*** Existing circuit and breaker
**** Refer to service demand calculations
***** All bold indicates new equipment, breakers, and feeders

Largest Motor: _____ KVA

DISTRIBUTION PANEL:		DP-LR (EXIST.)
MAINS	TYPE:	MAIN BREAKER
	SIZE:	400 AMP
BUS SIZE	PHASE:	400 AMP
	NEUTRAL:	400 AMP
	GROUND:	PER NEC

Date: 7/11/2024 | By: Joshua Reynoso

Job: Palm Beach Garden Police Dept. | Job No. 2005703

Mounting **SURFACE** | Voltage: **208Y/120V-3PH 4W** | A/C Rating **10000**
Main Type **MLO** | Main Size: **100 AMPS** | Ground **Equipment Ground**
Neutral **100%** | Lugs **SINGLE**

PANEL: **2LA**

ALL LOADS IN VA																							
Ltg.	Recept	Motor	Heat	Cool	Other	Kitchen	S/S	Description	Amp/P	Wire	Cir. No.	Ph	Cir. No.	Wire	Amp/P	Description	Ltg.	Recept	Motor	Heat	Cool	Other	Kitchen	S/S
					2400		0.00	FUME HOOD	30/1	#10	**1**	**A**	**2**	#12	20/1	WORKSTATION RECEPTS		540						0.00
							1.00	SPARE			**3**	**B**	**4**	#12	20/1	WORKSTATION RECEPTS		720						0.00
					2400		0.00	FUME HOOD	30/1	#10	**5**	**C**	**6**	#12	20/3	JUNCTION BOXES						700		0.00
							1.00	SPARE			**7**	**A**	**8**	#12	-	-						700		0.00
					1200		0.00	FUMING CHAMBER	20/1	#12	**9**	**B**	**10**	#12	-	-						700		0.00
					1000		0.00	CRIME LAB MINI REF.	20/1	#12	**11**	**C**	**12**	#12	20/1	JUNCTION BOXES						700		0.00
					1000		0.00	CRIME LAB REF.	20/1	#12	**13**	**A**	**14**	#12	20/3	JUNCTION BOXES						700		0.00
					1200		0.00	HEAT SEALER	20/1	#12	**15**	**B**	**16**	#12	-	-						700		0.00
					1200		0.00	MICROWAVE	20/1	#12	**17**	**C**	**18**	#12	-	-						700		0.00
					1200		0.00	DOWNFLOW	20/1	#12	**19**	**A**	**20**	#12	20/1	JUNCTION BOXES						700		0.00
	900						0.00	CRIME LAB RECEPT.	20/1	#12	**21**	**B**	**22**	#12	20/1	AFIS RECEPTS		900						0.00
	720						0.00	CRIME LAB QUAD	20/1	#12	**23**	**C**	**24**	#12	20/1	OFFICE RECEPTS		900						0.00
					1000		0.00	DRYING CABINET	20/1	#12	**25**	**A**	**26**	#12	20/1	BATHROOM RECEPT		360						0.00
	1000						0.00	DISPOSAL	20/1	#12	**27**	**B**	**28**	#12	20/1	EQUIP. RM RECEPT		180						0.00
	360						0.00	LOW LTG LAB QUAD	20/1	#12	**29**	**C**	**30**	#12	20/1	EF-2-1			667					0.00
	900						0.00	LOW LTG LAB RECEPT	20/1	#12	**31**	**A**	**32**	#12	20/1	SF-01			110					0.00
1050							0.00	LIGHTING	20/1	#12	**33**	**B**	**34**	#12	20/1	ROOF RECEPT.		360						0.00
	180						0.00	TOUCHLESS FAUCET	20/1	#12	**35**	**C**	**36**	#12	20/1	LAB CONV. RECEPTS		360						0.00
							0.00	SPACE			**37**	**A**	**38**			SPACE								0.00
		696					0.00	EMEF-2	30/1	#10	**39**	**B**	**40**	#10	30/1	EMSF-2			696					0.00
							0.00	SPACE			**41**	**C**	**42**			SPACE								0.00
1050	4060	696	0	0	12600	0	2.00	**TOTALS**								**TOTALS**	0	4320	1473	0	0	5600	0	0.00

LOAD SUMMARY							
Ltg.	Recept	Motor	Heat	Cool	Other	Kitchen	S/S
1.1	8.4	2.2	0.0	0.0	18.2	0.0	2.0
1.25	**	1.00	1.00	1.00	1.00	0.65	0.50
1.3	8.4	2.2	0.0	0.0	18.2	0.0	1.0

Description
Connected KVA
*Design Factors
Design KVA

Phase Load	
Ph	KVA
A	9.6
B	10.3
C	9.9

Panel Remarks:

*Input di...
**100% ...

	Con. KVA	Con. Amps		Des. KVA	Des. Amps
TOTAL	31.8	88.3		31.1	86.2

PANEL: **2LA**

Date: 7/11/2024 | By: Joshua Reynoso | 2LA2LA2

This item has been digitally signed and sealed by Daniel C. Rogers on the date adjacent to the seal. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

HARVARD•JOLLY | PBK
2047 Vista Parkway, Suite 100 | West Palm Beach, FL 33411 | 561-478-4457 | www.HarvardJolly.com | AR 0013140

LEAF ENGINEERS

PALM BEACH GARDENS
ADDITION FOR: POLICE DEPARTMENT
10500 NORTH MILITARY TRAIL PALM BEACH GARDENS, FL.
100% CONSTRUCTION DOCUMENTS

Comm. No: 20057.03
Date: 8/2/2024
Drawn: Author

Revisions		
No.	Date	Revision Description

TO THE BEST OF MY KNOWLEDGE, THE PLANS, AND SPECIFICATIONS COMPLY WITH THE MINIMUM BUILDING CODES.

DANIEL C. ROGERS LICENSE No. 67915 STATE OF FLORIDA PROFESSIONAL ENGINEER

08/02/2024

ELECTRICAL PANEL SCHEDULES

E-701

FILE PATH: C:_Revit\Local\E23_2005703-PALM BEACH POLICE_josh.reynoso.rvt

PRINTED: 8/2/2024 10:24:50 AM